

SLB-94

SIMFACT II


- universal totalizer
- internal cycles counter
- 3 independent reset inputs
- 2 relay outputs



Counter **SLB-94** makes possible counting in three separate, internal registers, defined as a current value, number of cycles and balance (total quantity). Counter is equipped with 2 relays, with independently defined switch-on aluation setpoints, which can be used for controlling of external devices. Relay number 1 is assigned to current value register; relay number 2 is assigned to register of counting cycles. Counter **SLB-94** is equipped with one counting input and three independent reset inputs, assigned to registers of current values, cycles and balance, respectively.

- readable, high brightness, 6-digit display,
- 3 separate internal counters,
- digital, anti-disturbance filter,
- 2 diodes informing about kind of displayed value,
- programmable prescaler with divider,
- programmable decimal point position,
- ACCESS option - easy threshold modification,
- available with AC and DC power supply versions.

Exemplary pin assignment

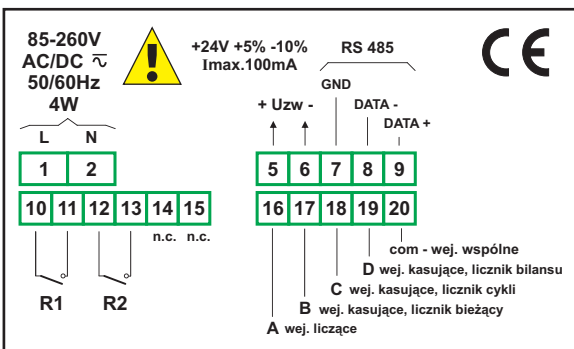

Ordering

SLB-94-142X-1-X-XX1

options:

- 00 : no options
- 01 : IP65

power supply:


- 3 : 24V AC/DC
- 4 : 85V - 260V AC/DC

type of outputs:

- 1 : REL
- 2 : OC

Typical applications

1. Counting of pulses which representing defined physical quantity,
2. Counting of production cycles,
3. Production totalization with power transmission system control of production line.

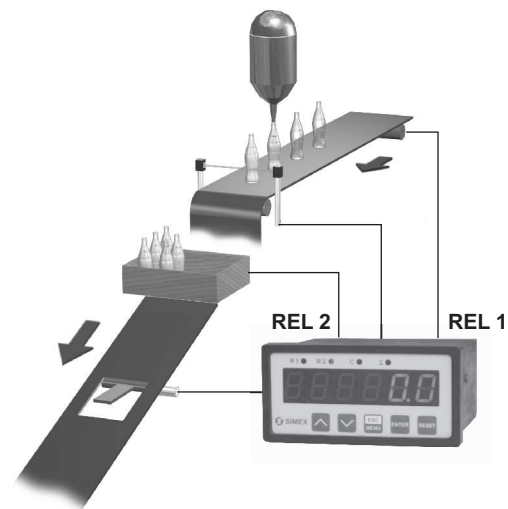

Technical data

Power supply: 19V ± 50V DC; 16V ± 35V AC or 85 ± 260V AC/DC

Power consumption: for 85 ± 260V AC/DC and 16V ± 35V AC power supply: max. 4,5 VA; 19V ± 50V DC power supply: max. 4,5 W

Display: LED, red, 6 x 13 mm high

Inputs: pulse

- A input - counting
- B input - reset of current values counter
- C input - reset of cycles counter
- D input - reset of totalizer counter
- COM - common input

Input levels: low: 0V ± 1V
high: 10V ± 30V

Measuring range: current values and cycles counter from 0 to 999999
totalizer counter from 0 to 999999

Transducer power supply output: 24V DC +5% -10% / max. 100 mA, stabilized, not insulated from measuring inputs

Outputs: 2 relays 1A/250V AC (cos φ = 1) or the OC 30mA/30VDC/100mW

Communication interface (option): RS 485, 8N1, 2400 bit/s ± 19200 bit/s, Modbus RTU (not galvanically isolated)

Data memory: non-volatile memory, EEPROM type

Operating temperature: 0°C + +50°C

Storage temperature: -10°C + +70°C

Max. input frequency: electronic: 10 kHz / 5 kHz (for quadrature)
contact: max. 90 Hz (adjustable filter)

Protection class: IP 65 (front side when an additional frame is installed); IP 40 (front side); IP 20 (case and connection clips)

Case: board

Case material: NORYL - GFN2S E1

Case dimensions: 96 x 48 x 100 mm

Panel cut-out dimensions: 90,5 x 43 mm

Installation depth: min. 102 mm

Board thickness: max. 5 mm